


## SERIES 1 FULL-BODY HARNESS

TECHNICAL DATA & SELL SHEET - ISSUE 1

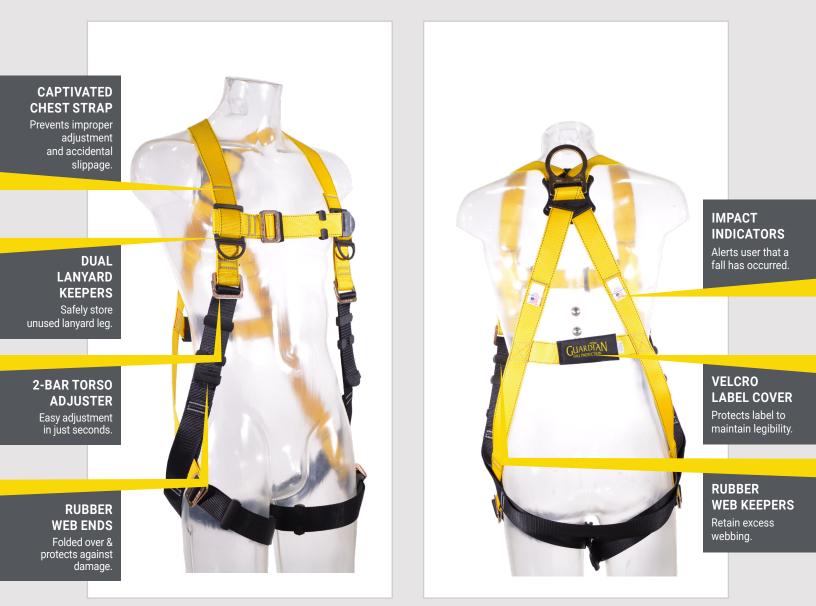

Webbing: Polyester D-Rings: Galvanized Steel Buckles: Galvanized Steel Capacity: 130-420 Lbs

**MULTIPLE BUCKLE CONFIGURATIONS AVAILABLE** FOR MORE INFO, PLEASE CALL **800-525-3313** OR VISIT **MASTERMANS.COM** 



PSG

PROD CODE

#37000-37022



## SERIES 1 FULL-BODY HARNESS

TECHNICAL DATA & SELL SHEET - ISSUE 1

### Applications



**Personal Fall Arrest:** A Series 1 Harness may be used in Personal Fall Arrest applications as a component of a Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum free fall is 6', unless used in combination with equipment explicitly certified for extended free fall. Applicable D-ring: Dorsal.




**Restraint:** A Series 1 Harness may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, & Shoulder. **Work Positioning:** A Series 1 Harness, configured with side D-rings, may be used in Work Positioning applications. Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. Maximum allowable free fall is 2'. Applicable D-rings: Side.



**Rescue/Confined Space:** A Series 1 Harness may be used in Rescue/Confined Space applications. Rescue systems function to safely recover a worker from a confined location or after exposed to a fall. There are various configurations of Rescue systems depending on the type of rescue. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. No free fall is permitted. Applicable D-rings: Dorsal, Chest, & Shoulder.

#### Standards

OSHA 1910
OSHA 1926 Subpart M
ANSI Z359.11-2014
ANSI A10.32-2012 regulations



Always follow all manufacturer's instructions for proper adornment and use. Some steps of adorning a harness may require assistance from another person.

Upon completely adorning a harness, Guardian Fall Protection recommends that another person, with knowledge of the safe and correct use of the harness, inspect to ensure the harness is being worn correctly.





PROD CODE





# SERIES 1 FULL-BODY HARNESS

INDIVIDUAL PRODUCT CODES



Prod. Code	Description	Size	User Weight
37000	Chest & Leg Pass-Through Buckles	XS-S	130-420 lbs
37001	Chest & Leg Pass-Through Buckles	M-L	130-420 lbs
37002	Chest & Leg Pass-Through Buckles	XL-2XL	130-420 lbs
37004	Chest Pass-Through, Leg Tongue Buckles	XS-S	130-420 lbs
37005	Chest Pass-Through, Leg Tongue Buckles	M-L	130-420 lbs
37006	Chest Pass-Through, Leg Tongue Buckles	XL-2XL	130-420 lbs
37008	Chest & Leg Pass-Through Buckles with Side D-rings	XS-S	130-420 lbs
37009	Chest & Leg Pass-Through Buckles with Side D-rings	M-L	130-420 lbs
37010	Chest & Leg Pass-Through Buckles with Side D-rings	XL-2XL	130-420 lbs
37012	Chest Pass-Through, Leg Tongue Buckles with Side D-rings	XS-S	130-420 lbs
37013	Chest Pass-Through, Leg Tongue Buckles with Side D-rings	M-L	130-420 lbs
37014	Chest Pass-Through, Leg Tongue Buckles with Side D-rings	XL-2XL	130-420 lbs
37016	Chest Quick-Connect, Leg Tongue Buckles	XS-S	130-420 lbs
37017	Chest Quick-Connect, Leg Tongue Buckles	M-L	130-420 lbs
37018	Chest Quick-Connect, Leg Tongue Buckles	XL-2XL	130-420 lbs
37020	Chest Quick-Connect, Leg Tongue Buckles with Side D-rings	XS-S	130-420 lbs
37021	Chest Quick-Connect, Leg Tongue Buckles with Side D-rings	M-L	130-420 lbs
37022	Chest Quick-Connect, Leg Tongue Buckles with Side D-rings	XL-2XL	130-420 lbs

**Custom configurations available. Not repairable.** Contact customer service for details.

FOR MORE INFO, PLEASE CALL 800-525-3313 OR VISIT MASTERMANS.COM

PSC PURE SAFETY GROU



PROD CODE

#37000-37022